SOFTSTYLE SHADES

Product Specifications Guide

ALTA

DOCUMENT USE

This document provides detailed product specifications only. Pricing information is now published separately in the Alta US Price Guide. (This guide was formerly known as the Retail Price List & Product Info Guide, which previously included both specifications and pricing.)

SUMMARY OF REVISIONS

1-20-2026 Revisions:

Various Pages.....Pricing information moved to the Alta US Price Guide

TABLE OF CONTENTS

- Pattern Information . . . 2
- Color Charts . . . 3-6
- Hardware colors, Stack Chart and Privacy Light Block . . . 6

Rectangular Configuration Specifications

- Cordless Lift . . . 7
- Cordless Lift & Lock™ . . . 8
- Continuous Cord Loop . . . 9

TriLight Shades®

- Smart Facts . . . 10
- Selecting a TriLight Shade . . . 10
- Sheer Pleated Color Chart . . . 11
- Configuration Specifications . . . 12-15

Product Configuration Specifications

- Bliss Automation . . . 16-19
- Somfy Automation . . . 20-21
- Powerwand . . . 22-23
- Vertical Application . . . 24-25
- Classic Skylight and Skylight with Automation . . . 26-27
- Arches . . . 28
- Specialty Shapes . . . 29-30

Oversize Common Carrier Delivery

All orders with any quantity of shades or blinds or any continuous valance 90" or more in width (or Vertical Applications over 90" in height) are considered oversize. Therefore, a net shipping charge per oversized unit will be assessed.

Oversized orders that require expedited shipping will be quoted and charged accordingly.

Please see General Information for additional freight and shipping charge information.

PATTERN INFORMATION

Pattern Name		# of Cells	Price Group (Standard)	Care Code	GREENGUARD Certification	Light Control	Hardware Restrictions
Light Filtering - Single Cell							
SoftStyle Beginnings Light Filtering – Large Single Cell	S50	Single	2-SS	1, 2 & 3	Yes	C	
SoftStyle Light Filtering – Small Single Cell	S11	Single	1-SS	1, 2 & 3	Yes	C	Vertical Application
SoftStyle Light Filtering – Large Single Cell	S21	Single	4-SS	1, 2 & 3	Yes	C	
Light Filtering - Double Cell							
SoftStyle Beginnings Light Filtering – Double Cell	S51	Double	3-SS	1, 2 & 3	Yes	C	Vertical Application, Arches
SoftStyle Light Filtering – Double Cell	S31	Double	5-SS	1, 2 & 3	Yes	C	Vertical Application
Blackout - Single Cell							
SoftStyle Blackout – Small Single Cell	S13	Single	6-SS	1 & 3	Yes	D	Vertical Application
SoftStyle Blackout – Large Single Cell	S23	Single	7-SS	1 & 3	Yes	D	
SoftStyle Subdue Blackout - Large Single Cell	S61	Single	8-SS	1 & 3	Yes	D	Vertical Application
Blackout - Double Cell							
SoftStyle Blackout – Double Cell	S32	Double	8-SS	1 & 3	Yes	D	Vertical Application
1-1/4" Cell							
SoftStyle Light Filtering – 1-1/4" Single Cell	S41	Single	9-SS	1, 2 & 3	Yes	C	Continous Cordloop, Cordless Lift & Lock, Skylight, Arches, Angles, Specialty Shapes, TriLight
SoftStyle Blackout – 1-1/4" Single Cell	S43	Single	10-SS	1, 2 & 3	Yes	D	Continous Cordloop, Cordless Lift & Lock, Skylight, Arches, Angles, Specialty Shapes, TriLight
Hybrid Pleat							
2" Hybrid Pleat – Light Filtering	HPF	Single	Hybrid Pleat Light Filtering	1, 2 & 3	Yes	C	Skylight, Arches, Angles, Specialty Shapes, PowerWand
2" Hybrid Pleat – Blackout	HPR	Single	Hybrid Pleat Blackout	1, 2 & 3	Yes	D	Skylight, Arches, Angles, Specialty Shapes, PowerWand

Hardware Options

- Continuous Cord Loop System
- Continuous Cord Loop Top-Down/Bottom-Up
- Cordless Lift System
- Cordless Lift System Top-Down/Bottom-Up
- Cordless Lift & Lock
- Cordless Lift & Lock Top-Down/Bottom-Up
- Top-Down
- Top-Down/Bottom-Up
- Two-On-One Rail
- TriLight
- Vertical Application
- Classic Skylight
- Arches
- Angles
- Specialty Shapes
- Powerwand
- Bliss Automation
  - Bottom Up
  - TDBU
  - TriLight
- Somfy Automation
  - Bottom Up

Care Method 1
Dusting with a feather, or synthetic, non-abrasive, material duster is recommended for cellular shade surfaces which are lightly soiled.

Care Method 2
Wiping with a soft, damp sponge or cloth, of non-abrasive material, with lukewarm water is recommended for cellular shade surfaces which need spot cleaning.

Care Method 3
Vacuuming with a soft bristle vacuum cleaner brush attachment is recommended for cellular shade surfaces which are heavily soiled.

LIGHT CONTROL DEFINITIONS

A	Sheer - Filtered light for an open, softened view, UV protection and glare reflection, when privacy is not a concern.
B	Semi-Sheer - Softly diffuses light while offering minimal privacy. Images, shapes and people can be seen with some clarity.
C	Light Filtering/Translucent - Softly diffuses sunlight and provides a moderate degree of privacy as only shadows will be discernible.
D	Room Darkening / Blackout - Room Darkening dramatically reduces light. Provides privacy against most direct light. Images, shapes and people are not discernible. Blackout fabrics provide the ultimate in light control and privacy; perfect for bedrooms, nurseries, or media rooms. Pair with side channels or privacy light block for additional light control.

FABRIC AND RAIL COLOR CHART

FABRIC			HARDWARE	
Code	Color #	Color Name	STD	VA
SMALL SINGLE CELL - Light Filtering				
S11	589	Afternoon Light	862	N/A
S11	1553	Birdbath	810	
S11	1556	Caribbean Sky	135	
S11	515	Cavern	841	
S11	510	Celadon	958	
S11	1655	Cloud Cover	885	
S11	581	Coastal Eddy	018	
S11	528	Daisy White	320	
S11	1567	Espresso Bean	849	
S11	1559	Fly Fishing	810	
S11	1658	Foggy Night	405	
S11	524	Gold Treasure	952	
S11	513	Graystone	810	
S11	1656	Gray Wisp	765	
S11	1565	Ground Cloves	960	
S11	1552	Gunnysack	862	
S11	526	Ice Age	862	
S11	1659	Ice Princess	661	
S11	1550	Ice Rink	885	
S11	1654	Imagine	018	
S11	1560	Lava Rock	405	
S11	529	Lemon Frost	674	
S11	500	Marshmallow	661	
S11	1557	Night Blue	450	
S11	1566	Oak Branch	849	
S11	584	Ocean Blue	450	
S11	527	Pale White *	785	
S11	1652	Parchment	885	
S11	1651	Pressed Petals	205	
S11	1564	Redwood	956	
S11	1561	Rock Garden	765	
S11	588	Rocking Chair	083	
S11	517	Rye	630	
S11	1650	Sandcastle	205	
S11	503	Scone	862	
S11	509	Silver Dollar	405	
S11	1653	Snowbank	785	
S11	582	Steel	018	
S11	1657	Stillness	276	
S11	1555	Summer Storm	765	
S11	521	Trail	810	
S11	501	Veil	862	

FABRIC			HARDWARE	
Code	Color #	Color Name	STD	VA
LARGE SINGLE CELL - Light Filtering				
S21	589	Afternoon Light	862	862
S21	1553	Birdbath	810	810
S21	1556	Caribbean Sky	135	661
S21	515	Cavern	841	841
S21	510	Celadon	958	862
S21	1655	Cloud Cover	885	661
S21	581	Coastal Eddy	018	276
S21	528	Daisy White	320	785
S21	1567	Espresso Bean	849	810
S21	1559	Fly Fishing	810	810
S21	1658	Foggy Night	405	276
S21	524	Gold Treasure	952	082
S21	513	Graystone	810	810
S21	1656	Gray Wisp	765	276
S21	1565	Ground Cloves	960	785
S21	1552	Gunnysack	862	862
S21	526	Ice Age	862	862
S21	1659	Ice Princess	661	661
S21	1550	Ice Rink	885	661
S21	1654	Imagine	018	276
S21	1560	Lava Rock	405	276
S21	529	Lemon Frost	674	882
S21	500	Marshmallow	661	661
S21	1557	Night Blue	450	661
S21	1566	Oak Branch	849	810
S21	584	Ocean Blue	450	661
S21	527	Pale White *	785	785
S21	1652	Parchment	885	661
S21	1651	Pressed Petals	205	862
S21	1564	Redwood	956	083
S21	1561	Rock Garden	765	276
S21	588	Rocking Chair	083	083
S21	517	Rye	630	841
S21	1650	Sandcastle	205	862
S21	503	Scone	862	862
S21	509	Silver Dollar	405	276
S21	1653	Snowbank	785	785
S21	582	Steel	018	276
S21	1657	Stillness	276	276
S21	1555	Summer Storm	765	276
S21	521	Trail	810	810
S21	501	Veil	862	862

FABRIC			HARDWARE	
Code	Color #	Color Name	STD	VA
DOUBLE CELL - Light Filtering				
S31	589	Afternoon Light	862	N/A
S31	1553	Birdbath	810	
S31	1556	Caribbean Sky	135	
S31	515	Cavern	841	
S31	510	Celadon	958	
S31	1655	Cloud Cover	885	
S31	581	Coastal Eddy	018	
S31	528	Daisy White	320	
S31	1567	Espresso Bean	849	
S31	1559	Fly Fishing	810	
S31	1658	Foggy Night	405	
S31	524	Gold Treasure	952	
S31	513	Graystone	810	
S31	1656	Gray Wisp	765	
S31	1565	Ground Cloves	960	
S31	1552	Gunnysack	862	
S31	526	Ice Age	862	
S31	1659	Ice Princess	661	
S31	1550	Ice Rink	885	
S31	1654	Imagine	018	
S31	1560	Lava Rock	405	
S31	529	Lemon Frost	674	
S31	500	Marshmallow	661	
S31	1557	Night Blue	450	
S31	1566	Oak Branch	849	
S31	584	Ocean Blue	450	
S31	527	Pale White *	785	
S31	1652	Parchment	885	
S31	1651	Pressed Petals	205	
S31	1564	Redwood	956	
S31	1561	Rock Garden	765	
S31	588	Rocking Chair	083	
S31	517	Rye	630	
S31	1650	Sandcastle	205	
S31	503	Scone	862	
S31	509	Silver Dollar	405	
S31	1653	Snowbank	785	
S31	582	Steel	018	
S31	1657	Stillness	276	
S31	1555	Summer Storm	765	
S31	521	Trail	810	
S31	501	Veil	862	

NOTE: Pale White (color 527) has a yellow hue. Please review the color carefully during the selection process.

CODE KEY:

STD = Cordless, Cordless Lift & Lock, Continuous Cord Loop, and Motorized with coordinated rails

VA = Vertical application shades

FABRIC AND RAIL COLOR CHART

FABRIC			HARDWARE	
Code	Color #	Color Name	STD	VA
SMALL SINGLE CELL - Blackout				
S13	1743	Birdbath	810	N/A
S13	1855	Cloud Cover	885	
S13	1856	Cookie Dough	862	
S13	1747	Espresso Bean	849	
S13	706	Goose Down	661	
S13	1748	Gray Gust	018	
S13	1744	Ground Pepper	765	
S13	710	Ice Princess	661	
S13	1854	Imagine	018	
S13	702	Irish Coffee	862	
S13	1750	Night Blue	450	
S13	1784	Ocean Blue	450	
S13	1851	Parchment	885	
S13	700	Pebble	361	
S13	701	Pitch Black	048	
S13	707	Pristine Palace	862	
S13	1745	Red Sand	956	
S13	704	Richwood	849	
S13	1853	Rocky Beach	785	
S13	708	Sand Sculpture	882	
S13	1746	Sandstone Gray	810	
S13	763	Silver Dollar	405	
S13	1852	Snowbank	785	
S13	740	Thunder Cloud	405	
S13	1850	Vanilla Ice Cream	785	
S13	1857	Weathered Brick	954	
S13	1858	Woods	405	
S13	1742	Yucca Cactus	135	

FABRIC			HARDWARE	
Code	Color #	Color Name	STD	VA
LARGE SINGLE CELL - Blackout				
S23	1743	Birdbath	810	810
S23	1855	Cloud Cover	885	661
S23	1856	Cookie Dough	862	862
S23	1747	Espresso Bean	849	862
S23	706	Goose Down	661	661
S23	1748	Gray Gust	018	276
S23	1744	Ground Pepper	765	276
S23	710	Ice Princess	661	661
S23	1854	Imagine	018	276
S23	702	Irish Coffee	862	862
S23	1750	Night Blue	450	661
S23	1784	Ocean Blue	450	661
S23	1851	Parchment	885	661
S23	700	Pebble	361	841
S23	701	Pitch Black	048	048
S23	707	Pristine Palace	862	862
S23	1745	Red Sand	956	083
S23	704	Richwood	849	810
S23	1853	Rocky Beach	785	785
S23	708	Sand Sculpture	882	882
S23	1746	Sandstone Gray	810	810
S23	763	Silver Dollar	405	276
S23	1852	Snowbank	785	785
S23	740	Thunder Cloud	405	276
S23	1850	Vanilla Ice Cream	785	785
S23	1857	Weathered Brick	954	082
S23	1858	Woods	405	276
S23	1742	Yucca Cactus	135	785

FABRIC			HARDWARE	
Code	Color #	Color Name	STD	VA
DOUBLE CELL - Blackout				
S32	1743	Birdbath	810	N/A
S32	1855	Cloud Cover	885	
S32	1856	Cookie Dough	862	
S32	1747	Espresso Bean	849	
S32	706	Goose Down	661	
S32	1748	Gray Gust	018	
S32	1744	Ground Pepper	765	
S32	710	Ice Princess	661	
S32	1854	Imagine	018	
S32	702	Irish Coffee	862	
S32	1750	Night Blue	450	
S32	1784	Ocean Blue	450	
S32	1851	Parchment	885	
S32	700	Pebble	361	
S32	701	Pitch Black	048	
S32	707	Pristine Palace	862	
S32	1745	Red Sand	956	
S32	704	Richwood	849	
S32	1853	Rocky Beach	785	
S32	708	Sand Sculpture	882	
S32	1746	Sandstone Gray	810	
S32	763	Silver Dollar	405	
S32	1852	Snowbank	785	
S32	740	Thunder Cloud	405	
S32	1850	Vanilla Ice Cream	785	
S32	1857	Weathered Brick	954	
S32	1858	Woods	405	
S32	1742	Yucca Cactus	135	

FABRIC			HARDWARE	
Code	Color #	Color Name	OPTION	VA
1-1/4" SINGLE CELL - Light Filtering				
Where applicable, coordinates with cellular color of the same name				
S41	500	Marshmallow	661	661
S41	1553	Birdbath	810	810
S41	513	Graystone	810	810
S41	581	Coastal Eddy	018	276
S41	582	Steel	018	276
S41	509	Silver Dollar	405	276
S41	527	Pale White (Yellow)	785	785
S41	589	Afternoon Light	862	862
S41	1552	Gunnysack	862	862
S41	1555	Summer Storm	765	276
S41	515	Cavern	841	841
S41	521	Trail	810	810

NOTE: Pale White (color 527) has a yellow hue. Please review the color carefully during the selection process.

FABRIC			HARDWARE	
Code	Color #	Color Name	OPTION	VA
1-1/4" SINGLE CELL - Blackout				
Where applicable, coordinates with cellular color of the same name				
S43	7500	Goose Down	661	661
S43	7553	Birdbath	810	810
S43	7610	Ice Princess	661	661
S43	7648	Gray Gust	018	276
S43	7509	Silver Dollar	405	276
S43	7640	Thunder Cloud	405	276

CODE KEY:

STD = Cordless, Cordless Lift & Lock, Continuous Cord Loop, and Motorized with coordinated rails

VA = Vertical application shades

NOTE: Fabric Color Names are NOT intended to be a literal representation of the fabric. Please review fabrics, especially lighter colors, in different lights and compared to other fabrics of similar color to ensure you make the selection that best meets your expectations. Any subtleties in the color will be more obvious when the material is stacked.

FABRIC AND RAIL COLOR CHART

FABRIC			HARDWARE	
Code	Color #	Color Name	OPTION	VA
2" HYBRID PLEAT - Light Filtering				
Where applicable, coordinates with cellular color of the same name				
HPF	2753	Caribbean Sky	135	661
HPF	715	Cavern	361	862
HPF	2750	Coastal Eddy	018	276
HPF	2852	Foggy Night	405	276
HPF	735	Ice Age	862	862
HPF	2851	Imagine	018	276
HPF	2752	Lava Rock	405	276
HPF	700	Marshmallow	661	661
HPF	727	Pale White *	785	785
HPF	2850	Stillness	276	276
HPF	2751	Summer Storm	765	276
HPF	739	Trail	810	810

NOTE: Pale White (color 727) has a yellow hue. Please review the color carefully during the selection process.

FABRIC			HARDWARE	
Code	Color #	Color Name	OPTION	VA
2" HYBRID PLEAT - Blackout				
Where applicable, coordinates with cellular color of the same name				
HPR	2950	Birdbath	810	810
HPR	2978	Cloud Cover	885	661
HPR	2951	Gray Gust	018	276
HPR	910	Ice Princess	661	661
HPR	2974	Imagine	018	276
HPR	919	Sandstone Gray	810	810

FABRIC			HARDWARE	
Code	Color #	Color Name	STD	VA
LARGE SINGLE CELL - Light Filtering				
S50	537	Boulder	765	276
S50	8501	Whiteboard	661	661
S50	8503	Banana Cream	320	785
S50	531	Merino	661	661
S50	8506	Soapstone	018	276
S50	532	Wafer	810	810

FABRIC			HARDWARE	
Code	Color #	Color Name	STD	VA
DOUBLE CELL - Light Filtering				
S51	537	Boulder	765	**N/A**
S51	8501	Whiteboard	661	
S51	8503	Banana Cream	320	
S51	531	Merino	661	
S51	8506	Soapstone	018	
S51	532	Wafer	810	

FABRIC			HARDWARE	
Code	Color #	Color Name	STD	VA
LARGE SINGLE CELL - Blackout				
S61	3744	Birdbath	810	**N/A**
S61	3741	Goose Down	885	
S61	3745	Gray Gust	018	
S61	3742	Ice Princess	885	
S61	3743	Pristine Palace	661	

CODE KEY:

STD = Cordless, Cordless Lift & Lock, Continuous Cord Loop, and Motorized with coordinated rails

VA = Vertical application shades

NOTE: Fabric Color Names are NOT intended to be a literal representation of the fabric. Please review fabrics, especially lighter colors, in different lights and compared to other fabrics of similar color to ensure you make the selection that best meets your expectations. Any subtleties in the color will be more obvious when the material is stacked.

HARDWARE COLOR CHART

Hardware Colors											
		STD	1-1/4"	VA	Cord Tensioner*			STD	1-1/4"	VA	Cord Tensioner*
018	Satin Silver	X	X	N/A	White	674	Bamboo Stalk	X	N/A	N/A	Vanilla
048	Black	X	X	X	black	685	Blue Sky	X	N/A	N/A	White
082	Camel	X	X	X	Light Brown	765	Silver Maple	X	X	N/A	White
083	Cocoa	X	X	X	Light Brown	785	Aspen White	X	X	X	Vanilla
127	Cameo	X	X	N/A	Vanilla	810	Mushroom	X	X	X	Dark Brown
135	Whisper Heather	X	X	N/A	White	841	Dark Blonde	X	X	X	Light Brown
205	Fawn	X	X	N/A	Vanilla	849	Mocha	X	N/A	N/A	Dark Brown
276	Silverado	X	X	X	White	862	Gardenia White	X	X	X	Vanilla
320	Rich Cream	X	N/A	N/A	Vanilla	882	Honey Bisque	X	X	X	Vanilla
361	Tender Taupe	X	X	N/A	Dark Brown	885	Flex White	X	X	N/A	White
405	Gray Flannel	X	X	N/A	Dark Brown	952	Pristine Beach	X	N/A	N/A	Light Brown
450	Skyline	X	X	N/A	White	954	Tranquil Tea	X	N/A	N/A	Light Brown
621	Putty	X	X	N/A	Vanilla	956	Renaissance Clay	X	N/A	N/A	Light Brown
630	Gold Leaf	X	N/A	N/A	Light Brown	958	Velvet Fern	X	N/A	N/A	Vanilla
661	White Tiara	X	X	X	White	960	Terra Cotta Urn	X	N/A	N/A	Vanilla
401	Silver Sand	X	X	X	White	180	Dove Gray	X	X	X	Dark Brown

*Effective on Continuous Cord Loop orders placed after 5/14/2024

STACK CHART

Family	48" Shade Drop	72" Shade Drop	84" Shade Drop	120" Shade Drop
Softstyle Light Filtering - Large Single Cell	1"	1-1/2"	1-3/4"	2-1/2"
Softstyle Light Filtering - Small Single Cell	1-1/8"	2"	2-1/4"	2-7/8"
Softstyle Light Filtering - Double Cell	1-5/8"	2-1/2"	2-5/8"	3-5/8"
Softstyle Light Filtering - 1-1/4" Single Cell (Max Drop 108")	1/2"	3/4"	1"	1-3/8"
Softstyle Blackout - Large Single Cell	7/8"	1-1/4"	1-1/2"	1-1/2"
Softstyle Blackout - Small Single Cell	7/8"	1-1/2"	1-3/4"	2"
Softstyle Blackout - Double Cell	3/4"	1-1/4"	1-1/2"	3"
Softstyle Blackout - 1-1/4" Single Cell (**Max Drop 108"**)	3/4"	1-1/8"	1-1/4"	1-5/8"
Softstyle Subdue Blackout - Large Single Cell	1-1/2"	2"	2-1/8"	2-1/2"
Softstyle Beginnings Light Filtering - Large Single Cell	1"	1"	1-1/4"	1-3/4"
Softstyle Beginnings Light Filtering - Double Cell	1-1/8"	1-7/8"	2"	2-1/2"
2" Hybrid Pleat - Light Filtering	3/4"	1-1/8"	1-1/2"	1-3/4"
2" Hybrid Pleat - Blackout	1"	1-1/4"	1-3/4"	2-1/8"

Hardware System	Rail heights to be added to the above
Lift & Lock - Deluxe Headrail	1-1/2"
Lift & Lock - Premium Headrail	2-1/2"
Continuous Cord Loop,Cordless, Motorized	2"
1-1/4" Cordless, Motorized	2"

PRIVACY LIGHT BLOCK

Privacy Light Block

- Available in 5 colors: White, Gray, Vanilla, Bronze and Black
- Inside Mount Only

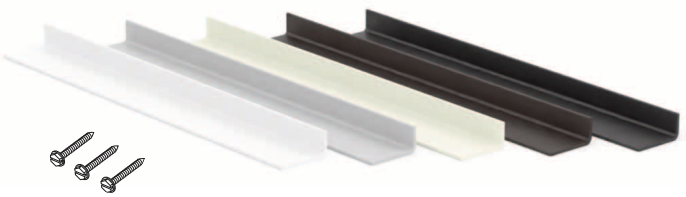

Surcharge applies; refer to price grids section.

Shade Deductions:

- If Privacy Light Block is selected – 1/2", in addition to the 1/4" for IB Only
- Available on Cordless, Lift & Lock, Powerwand, Bliss Automation and Somfy Automation

RECTANGULAR CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

CORDLESS LIFT SYSTEM

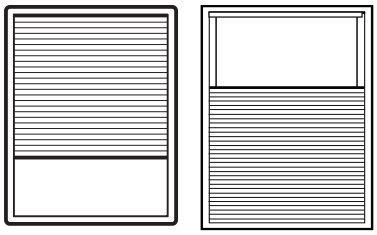

Uses steel snap-in brackets. Cordless easily lifts and lowers using the bottomrail handle. No lift cord is necessary.

All Cordless shades can be ordered with the fabric covered headrail and bottomrail **for a surcharge**, or with the color coordinated non-wrapped rails at no additional charge. Must be specified when order is placed.order is placed.

Cordless cellular shades come with a color-coordinated textured handle pre-inserted, a clear textured handle or clear plastic insert are optional.

Shades over 42" will have two handles. Single handle available, must be selected during order entry.

Cut-Outs are not available.

CORDLESS LIFT – SIZE STANDARDS

	Cellular				2" Hybrid Pleat	1-1/4"
	3/4" Light Filtering & Blackout Fabrics	**Subdue** Blackout **(S61)**	Small Single & Double cell Light Filtering Fabrics	Small Single & Double cell Blackout Fabrics	Light Filtering & Blackout	Light Filtering & Blackout
Min. Width (net)	14"	14"	16"	16"	16"	16"
Max. Width	120"	84"	120"	96"	120"	120"
Max. Width – End Mount	48"	48"	48"	48"	42"	N/A
Min. Height	12"	12"	12"	12"	12"	12"
Max. Height	84"	84"	84"	84"	84"	84"
Max Area (sq. ft.)	60	49	60	56	60	60

Note: Cut-outs are not available on Cordless Lift shades.

CORDLESS LIFT TOP-DOWN/BOTTOM-UP – SIZE STANDARDS

	Cellular			2" Hybrid Pleat	1-1/4"	1-1/4"
	All Light Filtering Fabrics	Subdue Blackout (S61)	**All other** Blackout Fabrics	Light Filtering & Blackout	Light Filtering	Blackout
Min. Width (net)	16"	16"	16"	16"	18"	18"
Max. Width	96"	84"	96"	120"	96"	96"
Max. Width – End Mount	48"	48"	48"	42"	N/A	N/A
Min. Height	12"	12"	12"	12"	12"	12"
Max. Height	84"	84"	84"	84"	84"	84"
Max Area (sq. ft.)	56	49	56	60	56	56

Note: Cut-outs are not available on Cordless Lift shades.



Top Down Bottom Up shades are now available with white striker plates and magnet caps when shades are ordered with fabric-wrapped rails.
Zinc striker plates & magnets comes standard on shades ordered with color-coordinated rails.
Striker plate & magnet placement:
Shades under 42" Wide – one magnet on each end of the shade
Shades 42" - 78" wide – one magnet on each end of the shade and one offset 3" from the center cord
Shades 78" - 96" wide – one magnet on each end of the shade and one in the center of the shade.
Shades over 96" wide – one magnet on each end of the shade and one at 3" to the left and right of the center routes.

CORDLESS LIFT TWO-ON-ONE – SIZE STANDARDS

	Cellular				2" Hybrid Pleat	1-1/4"
	3/4" Light Filtering & Blackout Fabrics	**Subdue** Blackout **(S61)**	Small Single & Double cell Light Filtering Fabrics	Small Single & Double cell Blackout Fabrics	Light Filtering & Blackout	Light Filtering & Blackout
Min Width (per panel)	14"	14"	16"	16"	16"	16"
Min Width (overall)	28"	28"	32"	32"	32"	32"
Max Width (per panel)	100"	84"	100"	96"	100"	96"
Max Width (overall)	120"	120"	120"	120"	120"	120"
Min Height	12"	12"	12"	12"	12"	12"
Max Height	84"	84"	84"	84"	84"	84"
Max Area (per panel) (Sq/Ft)	60	49	56	56	60	60

*** Two-On-One Headrail is not available in Top-Down/Bottom-Up or Trilight**

Note: End mount not available. Not available with Hold Down Brackets

Note: Cut-outs are not available on Cordless Lift shades.

CORDLESS LIFT THREE-ON-ONE – SIZE STANDARDS

	Cellular				2" Hybrid Pleat
	3/4" Light Filtering & Blackout Fabrics	Subdue Blackout (S61)	Small Single & Double cell Light Filtering Fabrics	Small Single & Double cell Blackout Fabrics	Light Filtering & Blackout
Min Width (per panel)	14"	14"	16"	16"	16"
Min Width (overall)	42"	42"	48"	48"	48"
Max Width (per panel)	100"	84"	100"	96"	120"
Max Width (overall)	174"	174"	174"	174"	174"
Min Height	12"	12"	12"	12"	12"
Max Height	84"	84"	84"	84"	84"
Max Area (per panel) (Sq/Ft)	60	49	60	56	60

*** Three-On-One Headrail is not available in Top-Down/Bottom-Up or Trilight**

Note: End mount not available. Not available with Hold Down Brackets

Note: Cut-outs are not available on Cordless Lift shades.

Note: 1-1/4" Pleat Fabrics are not available in the 3-on-1 Configuration

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

	SoftStyle	2" Hybrid Pleat
Inside (IB) Mounts		
Headrail unit (includes end caps)	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 3/8"
End (EB) Mounts		
Headrail unit (includes end caps)	– 1/2"	– 1/2"
Shade height	ordered height	ordered height
Fabric width	– 5/8"	– 5/8"
Outside (OB) Mount		
Headrail unit (includes end caps)	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 1/8"
2-on-1 & 3-on-1 Headrail		
Gap between panels	– 1/4"	– 1/4"

NOTE: Measurements may vary +/- 1/8".

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

	SoftStyle	2" Hybrid Pleat
Inside (IB) & End (EB) Mounts		
Minimum mounting depth	3/4"	3/4"
Minimum mounting depth, flush mount:	2-1/8"	2-1/8"
Outside (OB) Mount		
Minimum flat vertical surface	1-1/2"	1-1/2"

NOTE: Inside mount with hold down brackets deductions:
Headrail -1/2"
Fabric -5/8"
Bottomrail -1/2"

RECTANGULAR CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

CORDLESS LIFT & LOCK SYSTEM

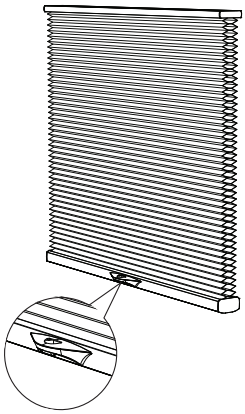

Press a button on the bottomrail to lift and lower the shade. Release the button to securely lock the shade into place.

No exposed cords on bottom up shades. Lift cords on Top-Down/Bottom-Up are on the far sides of the shade. Child-safe option.

All Cordless shades can be ordered with the fabric covered headrail and bottomrail **for a surcharge**, or with the color coordinated non -wrapped rails at **no additional charge**. **Must be specified** when order is placed.

Cordless Lift & Lock shades can be ordered with the Premium headrail **for a surcharge**. Premium headrail option is not available with Top-Down/Bottom-Up or TriLight.

Cordless Lift & Lock not available on 1-1/4" Pleat Fabrics.

CORDLESS LIFT & LOCK TOP-DOWN/BOTTOM-UP – SIZE STANDARDS			
	Cellular		2" Hybrid Pleat
	All Light Filtering Fabrics	All Blackout Fabrics	Light Filtering & Blackout
Min. Width (net)	16"	16"	16"
Max. Width	84"	84"	84"
Max. Width – End Mount	48"	48"	42"
Min. Height	12"	12"	12"
Max. Height	84"	84"	84"
Max Area (sq. ft.)	49	49	49

Cordless Lift & Lock is NOT available with 1-1/4" Pleat fabrics

Top-Down/bottom-Up Lift & Lock shades under 42" will have one magnet in the middle.

Shades over 42" will have one magnet in the middle, and one approximately 3" from each end to provide better closure between the middle rail and top rail.

CORDLESS LIFT & LOCK – SIZE STANDARDS			
	Cellular		2" Hybrid Pleat
	All Light Filtering Fabrics	All Blackout Fabrics	Light Filtering & Blackout
Min. Width (net)	10"	10"	10"
Max. Width	84"	84"	84"
Max. Width – End Mount	48"	48"	48"
Min. Height	12"	12"	12"
Max. Height	84"	84"	84"
Max Area (sq. ft.)	49	49	49

Cordless Lift & Lock is NOT available with 1-1/4" Pleat fabrics

CORDLESS LIFT & LOCK TWO-ON-ONE & THREE-ON-ONE – SIZE STANDARDS			
	Cellular		2" Hybrid Pleat
	All Light Filtering Fabrics	All Blackout Fabrics	Light Filtering & Blackout
Two-on-One			
Min. Width (net - per panel)	10"	10"	10"
Min Width (overall)	20"	20"	20"
Max. Width (per panel)	84"	84"	84"
Max. Width (overall)	168"	168"	168"
Three-on-One			
Min. Width (net - per panel)	10"	10"	10"
Min Width (overall)	30"	30"	30"
Max. Width (per panel)	84"	84"	84"
Max. Width (overall)	168"	168"	168"
Min. Height	12"	12"	12"
Max. Height	84"	84"	84"
Max Area (per panel) (sq. ft.)	49	49	49

NOTE: 2-on-1 or 3-on-1 Headrail is **not available** in Top-Down/Bottom-Up or Trilight or End Mount

Cordless Lift & Lock is NOT available with 1-1/4" Pleat fabrics

FINISHED DIMENSIONS – STANDARD

Adjustments are taken from ordered dimensions.

	SoftStyle	2" Hybrid Pleat
Inside (IB) Mounts		
Headrail unit (includes end caps)	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 3/8"
End (EB) Mounts		
Headrail unit (includes end caps)	– 1/2"	– 1/2"
Shade height	ordered height	ordered height
Fabric width	– 5/8"	– 5/8"
Outside (OB) Mount		
Headrail unit (includes end caps)	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 1/8"
2-on-1 & 3-on-1 Headrail		
Gap between panels	– 1/4"	– 1/4"

NOTE: Measurements may vary +/- 1/8".

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Standard Headrail	SoftStyle	2" Hybrid Pleat
Inside (IB) Mount		
Minimum mounting depth	1-1/4"	1-1/4"
Minimum mounting depth, flush mount:	2-1/4"	2-1/4"
End (EB) Mount		
Minimum flat vertical surface	2"	2"
Outside (OB) Mount		
Minimum flat vertical surface	1"	1"

Premium Headrail	SoftStyle	2" Hybrid Pleat
Inside (IB) & End (EB) Mounts		
Minimum mounting depth	3/4"	3/4"
Minimum mounting depth, flush mount:	2-1/8"	2-1/8"
Outside (OB) Mount		
Minimum flat vertical surface	1-1/2"	1-1/2"

NOTE: Inside mount with hold down brackets deductions:
Headrail -1/2"
Fabric -5/8"
Bottomrail -1/2"

RECTANGULAR CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

CONTINUOUS CORD LOOP SYSTEM



Uses steel snap-in brackets.
Continuous cord loop system easily lifts any shade – even large or hard-to-reach – and stops the shade exactly where you want. No more tangled cords!

All continuous cord loop shades can be ordered with the fabric covered headrail and bottomrail **for a surcharge**, or with the color coordinated non-wrapped rails at **no additional charge**. **Must be specified** when order is placed.

Continuous Cord Loop not available on 1-1/4" Pleat Fabrics.





SHADE HEIGHT	CORD LOOP DROP
up to 18"	18" loop
18" to 42"	24" loop
42-1/8" - 54"	36" loop
54-1/8" - 72"	48" loop
72-1/8" - 90"	60" loop
90-1/8" - 110"	72" loop
110-1/8" - 130"	96" loop
130-1/8" - 144"	120" loop

FINISHED DIMENSIONS – STANDARD

Adjustments are taken from ordered dimensions.

	SoftStyle	2" Hybrid Pleat*
Inside (IB) Mounts		
Headrail unit	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 5/8"
End (EB) Mounts		
Headrail unit	– 1/2"	– 1/2"
Shade height	ordered height	ordered height
Fabric width	– 5/8"	– 7/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 3/8"

*An extra 1/4" deduction will be taken from the fabric with the Top Down/ Bottom Up option for Hybrid Pleat
NOTE: Measurements may vary +/- 1/8".

FINISHED DIMENSIONS – 2 ON 1

Adjustments are taken from ordered dimensions.

	SoftStyle	2" Hybrid Pleat
Inside (IB) Mount		
Headrail unit	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width (includes gap deduction)	– 5/8"	– 7/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 3/8"
2 on 1 Headrail		
Gap between panels	– 1/4"	– 1/4"

NOTE: Measurements may vary +/- 1/8".

CONTINUOUS CORD LOOP – SIZE STANDARDS				
	Cellular			2" Hybrid Pleat
	All Light Filtering Fabrics	**Subdue** Blackout **(S61)**	**All other** Blackout Fabrics	Light Filtering & Blackout
Min. Width (net)*	18"	18"	18"	18"
Max. Width	120"	120"	120"	120"
Max. Width – End Mount	48"	48"	48"	42"
Min. Height	12"	12"	12"	12"
Max. Height*	120"	120"	120"	120"
Max. Area (sq. ft.)	100	90	100	60

Continuous Cord Loop is NOT available with 1-1/4" Pleat fabrics

CONTINUOUS CORD LOOP TWO-ON-ONE – SIZE STANDARDS			
	Cellular		2" Hybrid Pleat
	All Light Filtering Fabrics	All Blackout Fabrics	Light Filtering & Blackout
Min. Width (per panel)	18"	18"	18"
Min. Width (overall)	36"	36"	36"
Max. Width (per panel)	100"	96"	102"
Max. Width (overall)	120"	120"	120"
Min. Height	12"	12"	12"
Max. Height	120"	120"	120"
Max. Area (sq. ft.)	83	80	60

Note: End mount not available.
Continuous Cord Loop is NOT available with 1-1/4" Pleat fabrics

CONTINUOUS CORD LOOP TOP-DOWN/BOTTOM-UP – SIZE STANDARDS				
	Cellular			2" Hybrid Pleat
	All Light Filtering Fabrics	**Subdue** Blackout **(S61)**	**All other** Blackout Fabrics	Light Filtering & Blackout
Min. Width (net)*	24"	24"	24"	24"
Max. Width	120"	120"	120"	120"
Max. Width – End Mount	48"	48"	48"	42"
Min. Height	12"	12"	12"	12"
Max. Height*	120"	120"	120"	120"
Max. Area (sq. ft.)	100	90	100	60

Continuous Cord Loop is NOT available with 1-1/4" Pleat fabrics

On top-down/bottom-up Cellular shades a fabric insert is standard (Does not apply to Hybrid Pleat). This is an extra two-cell fabric gasket attached to the top headrail and acts as a seal to eliminate light leakage between the headrail and center rail when the shade is closed.

Right control operates the center moving rail; left control operates the bottomrail. Reverse controls are available.

NOTE: Inside mount with hold down brackets deductions:
Headrail -1/2"
Fabric -5/8"
Bottomrail -1/2"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

	SoftStyle	2" Hybrid Pleat
Inside (IB) Mount		
Minimum mounting depth	3/4"	3/4"
Minimum mounting depth, flush mount:	2-1/8"	2-1/8"
Outside (OB) Mount		
Minimum flat vertical surface	1-1/2"	1-1/2"

SMART FACTS

- The beautiful combination of a sheer pleated shade on top and cellular or 2" Hybrid Pleat shade on the bottom provides maximum versatility in a single window covering.
- Wide array of color options from whites, neutrals, and muted tones to bold colors.
- Four sheer pleated styles in multiple colors to meet most decorating tastes.
- Light Filtering and blackout cellular fabrics are available in multiple sizes, providing a choice for every window size and desired light and privacy control.
- Cellular fabric provides superior insulation for reduced heating and cooling bills. It also absorbs sound, making rooms more comfortable.
- The continuous cord loop option lifts any shade -- even large or hard-to-reach – and positions it exactly where you want without any dangling cords.
- The Cordless and Cordless Lift & Lock options provide safe, simple operation by raising and lowering the shade using handles instead of cords. Ideal in homes with children and pets.
- The Bliss Automation option provides safe, simple operation by raising and lowering the shade with the touch of a button or via the Bliss App (Bliss Bridge required). Ideal in homes with children and pets.

SELECTING A TRILIGHT SHADE

1. Choose a fabric, cell size and color for the bottom shade.
2. Choose a sheer pleated fabric for the top shade. See Sheer Pleated Color Chart.
3. Refer to the cellular and 2" Hybrid Pleat price grids on pages 17-18 to determine your bottom shade price.
4. Refer to the sheer pleated grids on page 19 to find your top shade price. Add the bottom shade, sheer pleated and control option prices together to determine your final price. Bliss Automation option and options prices can be found in the Bliss Automation pricing section.

- TriLight Shades are available as standard rectangle only.
- Continuous Cord Loop – right operates the middle rail; left operates the bottomrail. Reverse controls are available; grouped controls are NOT available.

SHEER PLEATED COLOR CHART

Nova Sheer Pleated		
Style Name	**Color #**	**Color Name**
Nova Sheer	P33-824	Blush
Nova Sheer	P33-820	Bridal White
Nova Sheer	P33-823	Crème
Nova Sheer	P33-821	Glacier White
Nova Sheer	P33-822	Light Lemon
Nova Sheer	P33-825	Tea

Carousel Sheer Pleated		
Style Name	**Color #**	**Color Name**
Carousel Sheer	P32-804	Blush
Carousel Sheer	P32-800	Bridal White
Carousel Sheer	P32-803	Crème
Carousel Sheer	P32-801	Glacier White
Carousel Sheer	P32-802	Light Lemon

Willa Sheer Pleated		
Style Name	**Color #**	**Color Name**
Willa Sheer	P05-506	Bisque
Willa Sheer	P05-508	Chocolate
Willa Sheer	P05-504	Crystal
Willa Sheer	P05-502	Heirloom
Willa Sheer	P05-501	Ice
Willa Sheer	P05-507	Latte
Willa Sheer	P05-505	Light Taupe
Willa Sheer	P05-500	Snow White
Willa Sheer	P05-503	Soft Ivory
Willa Sheer	P05-509	Twilight

Lyssa Sheer Pleated		
Style Name	**Color #**	**Color Name**
Lyssa Sheer	P04-405	Blush
Lyssa Sheer	P04-400	Bridal White
Lyssa Sheer	P04-402	Crème
Lyssa Sheer	P04-401	Glacier White
Lyssa Sheer	P04-403	Light Lemon
Lyssa Sheer	P04-407	Tea

SHEER PLEATED MAXIMUM WIDTHS		% UV BLOCKAGE
Nova Sheer	96"	60
Carousel Sheer	96"	60
Willa Sheer	83"	50
Lyssa Sheer	96"	60

TRILIGHT CONFIGURATION SPECIFICATIONS

TRILIGHT – CONTINUOUS CORD LOOP



Features same headrail as continuous cord loop system.

Options:

- Color-Coordinated painted rails – no extra charge
  - – rails, end caps, cord loops, and cord tensioner will color-coordinate to the bottom (honeycomb) fabric
- Fabric wrapped rails - surcharge applies
  - – fabric wrap rails, end caps, cord loops, and cord tensioner will color-coordinate to the bottom (honeycomb) fabric
- Headrail can be fabric wrapped to match the top (sheer) fabric
  - – surcharge applies
  - – bottomrail, middle rail, end caps, cord loops, and cord tensioner will color-coordinate to the bottom (honeycomb) fabric

NOTES:

- Right loop control operates the middle rail, left loop control operates the bottomrail.

Cut-outs are not available on TriLight Shades.

TriLight option not available on 1-1/4" Pleat Fabrics.

CONTINUOUS CORD LOOP – SIZE STANDARDS			
	All Light Filtering Fabrics	All Blackout Fabrics	2" Hybrid Pleat
Min. Width (net)	24"	24"	24"
Max. Width*	83" - 96"	83" - 96"	83" - 96"
Max. Width-End Mount	48"	48"	42"
Min. Height	12"	12"	12"
Max. Height	96"	96"	96"
Max. Area (sq. ft.)	64	50	60

*See sheer pleated maximum width limitations.

TriLight **not available** with 1-1/4" fabrics

NOTE: Inside mount with hold down brackets deductions: Headrail -1/2"
Fabric -5/8"
Bottomrail -1/2"

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.
Measurements may very +/- 1/8".

	SoftStyle	2" Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 7/8"
End (EB) Mounts		
Headrail unit	– 1/2"	– 1/2"
Shade height	ordered height	ordered height
Fabric width	– 5/8"	– 1-1/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 5/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

	SoftStyle	2" Hybrid Pleat
Inside (IB) & End (EB) Mounts		
Minimum mounting depth	3/4"	3/4"
Minimum mounting depth, flush mount:	2-1/8"	2-1/8"
Outside (OB) Mount		
Minimum flat vertical surface	1-1/2"	1-1/2"

TRILIGHT CONFIGURATION SPECIFICATIONS

TRILIGHT – CORDLESS



Sheer pleated lifts and lowers from the middle rail. Honeycomb and 2" Hybrid Pleat lift and lower from the bottomrail. No lift cords are necessary.

Options:

- Color-Coordinated painted rails - no extra charge
  - Headrail, bottomrail, and middle rail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric
- Fabric wrapped rails - surcharge applies
  - Fabric wrapped headrail, bottomrail, and middle rail, end caps, cord loops, and handles will coordinate to the bottom (honeycomb) fabric
- Headrail can be fabric wrapped to match the top (sheer) fabric - surcharge applies
  - Bottomrail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric

NOTES:

- Shades over 42" will have two handles in the middle rail and two handles in the bottomrail. Single handle available, must be selected during order entry.

Cut-outs are not available on TriLight Shades.

TriLight option not available on 1-1/4" Pleat Fabrics.

CORDLESS LIFT SYSTEM – SIZE STANDARDS			
	All Light Filtering Fabrics	All Blackout Fabrics	2" Hybrid Pleat
Min. Width (net)	16"	16"	16"
Max. Width**	83" - 96"	83" - 96"	83" - 96"
Max. Width-End Mount	48"	48"	42"
Min. Height	12"	12"	12"
Max. Height	84"	84"	84"
Max. Area (sq. ft.)	56	49	60

*See sheer pleated maximum width limitations.

TriLight **not available** with 1-1/4" fabrics

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.
Measurements may very +/- 1/8".

	SoftStyle	2" Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 3/8"
End (EB) Mounts		
Headrail unit	– 1/2"	– 1/2"
Shade height	ordered height	ordered height
Fabric width	– 5/8"	– 5/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 1/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

	SoftStyle	2" Hybrid Pleat
Inside (IB) & End (EB) Mounts		
Minimum mounting depth	3/4"	3/4"
Minimum mounting depth, flush mount:	2-1/8"	2-1/8"
Outside (OB) Mount		
Minimum flat vertical surface	1-1/2"	1-1/2"

NOTE: Inside mount with hold down brackets deductions:
Headrail -1/2"
Fabric -5/8"
Bottomrail -1/2"

TRILIGHT CONFIGURATION SPECIFICATIONS

TRILIGHT – CORDLESS LIFT & LOCK

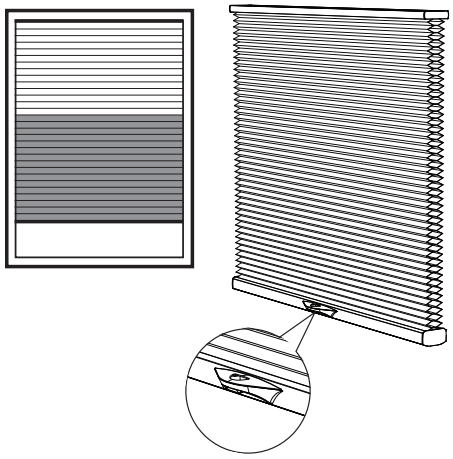

CORDLESS LIFT & LOCK – SIZE STANDARDS			
	All Light Filtering Fabrics	All Blackout Fabrics	2" Hybrid Pleat Fabrics
Min. Width (net)	12"	12"	12"
Max. Width	84"	84"	84"
Max. Width - End Mount	48"	48"	42"
Min. Height	12"	12"	12"
Max. Height	84"	84"	84"
Max. Area (sq. ft.)	49	49	49

*Maximum width on Whisper Sheer is 83", all other patterns 84".

TriLight **not available** with 1-1/4" fabrics

Options:

- Color-Coordinated painted rails - no extra charge
  – Headrail, bottomrail, and middle rail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric

- Fabric wrapped rails - surcharge applies
  – fabric wrapped headrail, bottomrail, and middle rail, end caps, cord loops, and handles will coordinate to the bottom (honeycomb) fabric

Must be specified when order is placed.

TriLight option not available on 1-1/4" Pleat Fabrics.

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.
Measurements may very +/- 1/8".

	SoftStyle	2" Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 3/8"
End (EB) Mounts		
Headrail unit	– 1/2"	– 1/2"
Shade height	ordered height	ordered height
Fabric width	– 5/8"	– 5/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 1/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

	SoftStyle	2" Hybrid Pleat
Inside (IB) & End (EB) Mounts		
Minimum mounting depth	1-1/4"	1-1/4"
Minimum mounting depth, flush mount:	2-1/4"	2-1/4"
End (EB) Mounts		
Minimum flat vertical surface	2"	2"
Outside (OB) Mount		
Minimum flat vertical surface	1"	1"

NOTE: Inside mount with hold down brackets deductions:
Headrail -1/2"
Fabric -5/8"
Bottomrail -1/2"

TRILIGHT CONFIGURATION SPECIFICATIONS

TRILIGHT – BLISS AUTOMATION



Sheer pleated lifts and lowers from the middle rail. Honeycomb and 2" Hybrid Pleat lift and lower from the bottomrail. No lift cords are necessary.

Options:

- Color-Coordinated painted rails - no extra charge
  - – Headrail, bottomrail, and middle rail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric
- Fabric wrapped rails - surcharge applies
  - – fabric wrapped headrail, bottomrail, and middle rail, end caps, cord loops, and handles will coordinate to the bottom (honeycomb) fabric
- Headrail can be fabric wrapped to match the top (sheer) fabric - surcharge applies
  - – Bottomrail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric

Cut-outs are not available on TriLight Shades.

TriLight option not available on 1-1/4" Pleat Fabrics.

BLISS AUTOMATION – SIZE STANDARDS				
	All Light Filtering Fabrics	All Blackout Fabrics	2" Hybrid Pleat	2" Hybrid Pleat
	Right Side Control	**Left Side Control**	**Right Side Control**	**Left Side Control**
Min. Width (net)	30-1/8"	35-1/8"	30-1/8"	35-1/8"
Max. Width*	83" - 96"	83" - 96"	83" - 96"	83" - 96"
Min. Height	18"	18"	18"	18"
Max. Height	96"	96"	96"	96"
Max. Area (sq. ft.)	n/a *	n/a *	n/a	n/a

*See sheer pleated maximum width limitations.
TriLight not available with 1-1/4" fabrics
* **S31 Double Cell** Light Filtering - Max Sq Ft 50
* **S32 Double Cell** Blackout - Max Sq Ft 55
* **S61 Single Cell** Blackout - Max Sq Ft 45

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

	Cellular	Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 3/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 1/8"

NOTE: Measurements may vary ± 1/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Cellular & Hybrid Pleat

Inside (IB) Mount	
Minimum mounting depth	3/4"
Minimum mounting depth, flush	2-1/8"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Cellular & Hybrid Pleat

Inside (IB) Mount	
Minimum mounting depth	2-5/8"
Minimum mounting depth, flush	3-1/4"

Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

NOTE: Inside mount with hold down brackets deductions:
Headrail -1/2"
Fabric -5/8"
Bottomrail -1/2"

BLISS AUTOMATION CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

BLISS AUTOMATION LIFT 0.6 DC (EXTERNAL POWERSOURCE)

- DC= Requires External source of power
- Features the same headrail and bottomrail as Cordless Lift. Fabric wrapped rails are available for a surcharge. Color-coordinated rails are available at no additional charge. Must be specified when ordering.

SIZE STANDARDS	Bottom-Up	
	All Cellular Fabrics	2" Hybrid Pleat
Minimum NET Width*	18" / 24"	18"
Maximum Width	120"	120"
Minimum Height	12"	12"
Maximum Height	108"	108"

NOTES:

1) Minimum width for 1-1/4" Pleat is 24"

2) End Mount not available

3) 1-1/4" Pleat is not available with Top-Down/Bottom-Up

4) Max height varies by width and fabric type. Refer to chart on page 36

5) Top-Down/Bottom-Up control side + charging port location

The minimum inside mount width is 19" when ordered with hold-down brackets

Note: Bliss Bottom-Up with external power source has a right side motor position only

2-on-1 HEADRAIL - SIZE STANDARDS	Bottom-Up	
	All Cellular Fabrics	2" Hybrid Pleat
Minimum NET Width (per panel)	20" / 24"	20"
Minimum NET Width (overall)	40" / 48"	40"
Maximum Width (per panel)	120"	120"
Maximum Width (overall)	144" / 120"	144"
Minimum Height	12"	12"
Maximum Height	108"	108"

NOTES:

1) Max height varies by width and fabric type. Refer to chart on page 36

2) Minimum panel width for 1-1/4" Pleat is 24" (per panel) and 48" (overall)

3) End Mount is not available

4) TDBU is not available on 2-on1

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

	Cellular	Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 3/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 1/8"

NOTE: Measurements may vary ± 1/8"

Adjustments are taken from ordered dimensions.

	1-1/4" Fabrics
Inside (IB) Mounts	
Headrail unit	– 1/4"
Shade height	ordered height
Fabric width	– 3/8"
Outside (OB) Mount	
Headrail unit	ordered width
Shade height	ordered height
Fabric width	– 1/8"

NOTE: 1-1/4" Fabrics are not available with Bliss Top-Down/Bottom-Up

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Powersource Not Mounted to Headrail

	Cellular and Hybrid Pleat
Inside (IB) Mount	
Minimum mounting depth	3/4"
Minimum mounting depth, flush mount:	2-1/8"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

External Battery - Mounted to the back of the Headrail

	Cellular and Hybrid Pleat
Inside (IB) Mount	
Minimum mounting depth	2-5/8"
Minimum mounting depth, flush mount	3-1/4"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Extension Brackets required for Battery - Mounted to the back of the Headrail

Use a metal tape measure for all measurements.

External Battery - Mounted away from the Headrail

	1-1/4" Fabrics
Inside (IB) Mount	
Minimum mounting depth	1-5/8"
Minimum mounting depth, flush mount:	3"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

External Battery - Mounted to the back of the Headrail

Inside (IB) Mount	
Minimum mounting depth	2-5/8"
Minimum mounting depth, flush mount:	4"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Extension Brackets required for External Battery - Mounted to the back of the Headrail

BLISS AUTOMATION CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

BLISS AUTOMATION BU & TDBU 0.6 LI-ION (INTERNAL BATTERY)

- Li-Ion= Features Internal Battery
- Features the same headrail and bottomrail as Cordless Lift. Fabric wrapped rails are available for a surcharge. Color-coordinated rails are available at no additional charge. Must be specified when ordering.

SIZE STANDARDS					
	Bottom-Up			Top-Down/Bottom-Up	
	Cellular Fabrics	2" Hybrid Pleat	1-1/4" Fabrics	Right Side Control	Left Side Control
Minimum NET Width*	18-1/8"	18-1/8"	24"	30"	35"
Maximum Width	120"	120"	120"	120"	120"
Minimum Height	12"	12"	18"	18"	18"
Maximum Height	108"	108"	108"	108"	108"

NOTES:

1) Max height varies by width and fabric type. Refer to chart on page 36 & 37

2) End Mount not available

The minimum inside mount width is 19" for single, large and double and 25" for 1-1/4" fabric for when ordered with hold-down brackets

2-on-1 HEADRAIL - SIZE STANDARDS			
	Bottom-Up		
	Cellular Fabrics	2" Hybrid Pleat	1-1/4" Fabrics
Minimum NET Width (per panel)	20"	20"	24"
Minimum NET Width (overall)	40"	40"	48"
Maximum Width (per panel)	120"	120"	120"
Maximum Width (overall)	144"	144"	144"
Minimum Height	12"	12"	12"
Maximum Height	108"	108"	108"

NOTES:

1) Max height varies by width and fabric type. Refer to chart on page 36

2) TDBU is not available on 2-on-1

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

	Cellular Fabrics	Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 3/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 1/8"

NOTE: Measurements may vary ± 1/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Cellular Fabrics & Hybrid Pleat

Inside (IB) Mount	
Minimum mounting depth	3/4"
Minimum mounting depth, flush mount:	2-1/8"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Extension Brackets required for Battery - Mounted to the back of the Headrail

1-1/4" Fabrics

Inside (IB) Mount	
Minimum mounting depth	2-5/8"
Minimum mounting depth, flush mount	3-1/4"

Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Extension Brackets required for Battery - Mounted to the back of the Headrail

SIZE STANDARDS – BLISS AUTOMATION

BLISS AUTOMATION MAXIMUM HEIGHTS Bottom-Up						
CODE	**SHADE NET WIDTH TO:**	**18" – 72" ***	**84"**	**96"**	**108"**	**120"**
S50	SoftStyle Beginnings - Light Filtering	108"	108"	108"	108"	108"
					55 Sq Ft Max - Over 96"	
S51	SoftStyle Beginnings - Double Cell	108"	108"	108"	73"	66"
					55 Sq Ft Max - Over 96"	
S11	Softstyle Light Filtering - Small Single Cell	108"	108"	108"	73"	66"
					65 Sq Ft Max - Over 96"	
S21	Softstyle Light Filtering - Large Single Cell	108"	108"	108"	87"	78"
		50 Sq Ft Max - Up to 96"			**45 Sq Ft Max - Over 96"**	
S31	Softstyle Light Filtering - Double Cell	100"	85"	75"	60"	54"
					80 Sq Ft Max - Over 96"	
S13	Softstyle Blackout - Small Single Cell	108"	108"	108"	106"	96"
					80 Sq Ft Max - Over 96"	
S23	Softstyle Blackout - Large Single Cell	108"	108"	108"	106"	96"
		55 Sq Ft Max - Up to 96"			**45 Sq Ft Max - Over 96"**	
S32	SoftStyle 1/2" Double Cell Double Cell Blackout	108"	94"	82"	60"	54"
		45 Sq Ft Max - Up to 96"			**35 Sq Ft Max - Over 96"**	
S61	Softstyle Subdue Blackout	90"	77"	67"	46"	42"
S41					**50 Sq Ft Max - Over 96"**	
S41	Softstyle Light Filtering - 1-1/4" Single Cell (min width 24")	108"	108"	108"	67"	60"
S43					**65 Sq Ft Max - Over 96"**	
S43	Softstyle Blackout - 1-1/4" Single Cell (min width 24")	108"	108"	108"	87"	78"
					50 Sq Ft Max - Over 96"	
HPF	2" Hybrid Pleat - Light Filtering	108"	108"	108"	67"	60"
		55 Sq Ft Max - Up to 96"			**40 Sq Ft Max - Over 96"**	
HPR	2" Hybrid Pleat - Blackout	108"	94"	82"	53"	48"

NOTES:

DC = Requires External source of power

Li-ion = Features Internal Battery

1) Minimum Panel Width for 1-1/4" is 24"

2) 2-on-1 Minimum Panel Width 20" (24" for 1-1/4")

3) 2-on-1 Maximum Width (overall) is 144"

4) For fabrics showing less than 108" Drop @ 72" wide, a square foot restriction applies and is noted

SIZE STANDARDS – BLISS AUTOMATION

BLISS AUTOMATION MAXIMUM HEIGHTS Top-Down/Bottom-Up						
CODE	SHADE NET WIDTH TO:	18" – 72" *	84"	96"	108"	120"
S50	SoftStyle Beginnings - Light Filtering	108"	108"	108"	108"	108"
						55 Sq Ft Max - Over 96"
S51	SoftStyle Beginnings - Double Cell	108"	108"	108"	73"	66"
						55 Sq Ft Max - Over 96"
S11	Softstyle Light Filtering - Small Single Cell	108"	108"	108"	73"	66"
						65 Sq Ft Max - Over 96"
S21	Softstyle Light Filtering - Large Single Cell	108"	108"	108"	87"	78"
			50 Sq Ft Max - Up to 96"			**45 Sq Ft Max - Over 96"**
S31	Softstyle Light Filtering - Double Cell	100"	85"	75"	60"	54"
						80 Sq Ft Max - Over 96"
S13	Softstyle Blackout - Small Single Cell	108"	108"	108"	106"	96"
						80 Sq Ft Max - Over 96"
S23	Softstyle Blackout - Large Single Cell	108"	108"	108"	106"	96"
			55 Sq Ft Max - Up to 96"			**45 Sq Ft Max - Over 96"**
S32	SoftStyle 1/2" Double Cell Double Cell Blackout	108"	94"	82"	60"	54"
			45 Sq Ft Max - Up to 96"			**35 Sq Ft Max - Over 96"**
S61	Softstyle Subdue Blackout	90"	77"	67"	46"	42"
						50 Sq Ft Max - Over 96"
S41	Softstyle Light Filtering - 1-1/4" Single Cell	108"	108"	108"	66"	60"
						65 Sq Ft Max - Over 96"
S43	Softstyle Blackout - 1-1/4" Single Cell	108"	108"	108"	86"	78"
						50 Sq Ft Max - Over 96"
HPF	2" Hybrid Pleat - Light Filtering	108"	108"	108"	67"	60"
			55 Sq Ft Max - Up to 96"			**40 Sq Ft Max - Over 96"**
HPR	2" Hybrid Pleat - Blackout	108"	94"	82"	53"	48"

NOTES:

1) For fabrics showing less than 108" Drop @ 72" wide, a square foot restriction applies and is noted

2) Minimum Width for Top-Down/Bottom-Up is 30" Right Side Control & 35" Left Side Control

Control Side => Location of Charging Port & Reset Button

SOMFY AUTOMATION CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

SOMFY AUTOMATION

- Features the same headrail and bottomrail as Cordless Lift, and Continuous Cord Loop. Fabric wrapped rails are available **for a surcharge**. Color-coordinated rails are available at **no additional charge**. Must be specified when ordering.

SOMFY AUTOMATION - SIZE STANDARDS			
	Bottom-Up		
	Cellular Fabrics	2" Hybrid Pleat	1-1/4" Fabrics
Minimum NET Width	18"	18"	24"
Maximum Width	120"	120"	120"
Minimum Height	12"	12"	12"
Maximum Height	108"	108"	108"

NOTES:

1) Max height varies by width and fabric type. Refer to chart on page 39

2) End Mount not available

The minimum inside mount width is 19" for single, large and double and 25" for 1-1/4" fabric for when ordered with hold-down brackets

SOMFY AUTOMATION - 2-on-1 HEADRAIL SIZE STANDARDS		
	Bottom-Up	
	Cellular Fabrics	2" Hybrid Pleat
Minimum NET Width (per panel)	18"	18"
Minimum NET Width (overall)	36"	36"
Maximum Width (per panel)	120"	120"
Maximum Width (overall)	144"	144"
Minimum Height	12"	12"
Maximum Height	108"	108"

NOTES:

1) Max height varies by width and fabric type. Refer to chart on page 39

2) End Mount not available

3) Not Available with 1-1/4"

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

	Cellular	Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 3/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 1/8"

NOTE: Measurements may vary ± 1/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Powerwand Not Mounted to Headrail

	Cellular & Hybrid Pleat
Inside (IB) Mount	
Minimum mounting depth	3/4"
Minimum mounting depth, flush mount:	2-1/8"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

External Battery - Mounted to the back of the Headrail

	Cellular & Hybrid Pleat
Inside (IB) Mount	
Minimum mounting depth	2-5/8"
Minimum mounting depth, flush mount	3-1/4"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Extension Brackets required for Battery - Mounted to the back of the Headrail

Power source Not Mounted on Headrail

	1-1/4" Fabrics
Inside (IB)	
Minimum mounting depth	1-5/8"
Minimum mounting depth, flush mount:	3"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

External Battery - Mounted to the back of the Headrail

	1-1/4" Fabrics
Inside (IB)	
Minimum mounting depth	2-5/8"
Minimum mounting depth, flush mount:	4"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Extension Brackets required for Battery - Mounted to the back of the Headrail

SOMFY AUTOMATION SIZE STANDARDS

SOMFY AUTOMATION MAXIMUM HEIGHTS Bottom-Up						
CODE	**SHADE NET WIDTH TO:**	**18" – 72" ***	**84"**	**96"**	**108"**	**120"**
S50	SoftStyle Beginnings - Light Filtering	108"	108"	108"	108"	108"
					75 Sq Ft Max - Over 96"	
S51	SoftStyle Beginnings - Double Cell	108"	108"	108"	100"	90"
					70 Sq Ft Max - Over 96"	
S11	Softstyle Light Filtering - Small Single Cell	108"	108"	108"	93"	84"
					85 Sq Ft Max - Over 96"	
S21	Softstyle Light Filtering - Large Single Cell	108"	108"	108"	108"	102"
					60 Sq Ft Max - Over 96"	
S31	Softstyle Light Filtering - Double Cell	108"	108"	108"	80"	72"
S13	Softstyle Blackout - Small Single Cell	108"	108"	108"	108"	108"
S23	Softstyle Blackout - Large Single Cell	108"	108"	108"	108"	108"
					55 Sq Ft Max - Over 96"	
S32	SoftStyle 1/2" Double Cell Double Cell Blackout	108"	108"	108"	73"	66"
		70 Sq Ft Max - Up to 96"			**50 Sq Ft Max - Over 96"**	
S61	Softstyle Subdue Blackout	108"	108"	105"	67"	60"
					55 Sq Ft Max - Over 96"	
S41	Softstyle Light Filtering - 1-1/4" Single Cell	108"	108"	108"	73"	66"
					65 Sq Ft Max - Over 96"	
S43	Softstyle Blackout - 1-1/4" Single Cell	108"	108"	108"	86"	78"
					55 Sq Ft Max - Over 96"	
HPF	2" Hybrid Pleat - Light Filtering	108"	108"	108"	93"	84"
					55 Sq Ft Max - Over 96"	
HPR	2" Hybrid Pleat - Blackout	108"	108"	108"	73"	66"

NOTES:

1) 2-on-1 Minimum Panel Width 18"

2) 2-on-1 Maximum Width (overall) is 144"

3) For fabrics showing less than 108" Drop @ 72" wide, a square foot restriction applies and is noted

POWERWAND CONFIGURATION SPECIFICATIONS

POWERWAND

POWERWAND - SIZE STANDARDS		
	Cellular Fabrics	1-1/4" Fabrics
Minimum NET Width - **Bottom-Up**	21"	24"
Maximum Width	120"	120"
Minimum Height	12"	12"
Maximum Height	108"	108"

NOTES:

1) PowerWand not available with 2" Hybrid Pleat

2) Max height varies by width and fabric type. Refer to chart on page 41

The minimum inside mount width is 22" for single, double and large cellular fabrics and 25" for 1-1/4" fabrics when ordered with hold-down brackets

PLEASE NOTE- At narrower widths the bottomrail may not travel smoothly during operation. This is an inherent characteristic and not considered a defect.

Powerwand – 2-on-1- SIZE STANDARDS		
Two-on-One Headrail		
	Cellular Fabrics	1-1/4" Fabrics
Minimum NET Width - Per Panel	24-1/4"	24"
Minimum NET Width - Overall	48-1/2"	48"
Maximum Width - Per Panel	120"	120"
Maximum Width - Overall	144"	144"
Minimum Height	12"	12"
Maximum Height	108"	108"

NOTES:

Powerwand is not available with Hybrid pleat

Max height varies by width and fabric type. Refer to chart on page 41

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

	Cellular Fabrics
Inside (IB) Mounts	
Headrail unit	– 1/4"
Shade height	ordered height
Fabric width	– 3/8"
Outside (OB) Mount	
Headrail unit	ordered width
Shade height	ordered height
Fabric width	– 1/8"

NOTE: Measurements may vary ± 1/8"

NOTE: PowerWand is **not available** with Hybrid Pleat

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

	3/8", Double Cell, 3/4"	1-1/4"
Inside (IB) Mount		
Minimum mounting depth	3/4"	1-3/4"
Minimum mounting depth, flush mount:	2-1/8"	3"
Outside (OB) Mount		
Minimum flat vertical surface	1-1/2"	1-1/2"

POWERAND SIZE STANDARDS

POWERWAND MAXIMUM HEIGHTS						
CODE	SHADE NET WIDTH TO:	21" – 72" *	84"	96"	108"	120"
S50	SoftStyle Beginnings - Light Filtering	108"	108"	108"	108"	108"
						55 Sq Ft Max - Over 96"
S51	SoftStyle Beginnings - Double Cell	108"	108"	108"	73"	66"
						55 Sq Ft Max - Over 96"
S11	Softstyle Light Filtering - Small Single Cell	108"	108"	108"	73"	66"
						65 Sq Ft Max - Over 96"
S21	Softstyle Light Filtering - Large Single Cell	108"	108"	108"	87"	78"
			50 Sq Ft Max - Up to 96"			45 Sq Ft Max - Over 96"
S31	Softstyle Light Filtering - Double Cell	100"	85"	75"	60"	54"
						80 Sq Ft Max - Over 96"
S13	Softstyle Blackout - Small Single Cell	108"	108"	108"	106"	96"
						80 Sq Ft Max - Over 96"
S23	Softstyle Blackout - Large Single Cell	108"	108"	108"	106"	96"
			55 Sq Ft Max - Up to 96"			45 Sq Ft Max - Over 96"
S32	SoftStyle 1/2" Double Cell Double Cell Blackout	108"	94"	82"	60"	54"
			45 Sq Ft Max - Up to 96"			35 Sq Ft Max - Over 96"
S61	Softstyle Subdue Blackout	90"	77"	67"	46"	42"
						50 Sq Ft Max - Over 96"
S41	Softstyle Light Filtering - 1-1/4" Single Cell	108"	108"	108"	66"	60"
						65 Sq Ft Max - Over 96"
S43	Softstyle Blackout - 1-1/4" Single Cell	108"	108"	108"	86"	78"

NOTES:

1) **PowerWand is not available with Hybrid Pleat**
2) **PowerWand minimum panel width is 21" for single, double and large, the minimum is 25" for 1-1/4"**
3) **PowerWand 2-on-1 Minimum Panel Width 24-1/4"**
4) **PowerWand 2-on-1 Maximum Width (overall) is 144"**
5) **For fabrics showing less than 108" Drop @ 72" wide, a square foot restriction applies and is noted**

VERTICAL APPLICATION CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

- Fits rectangular window and door openings
- Opens and closes from side to side; ideal for sliding glass doors & French doors
- Five fabric stacking options:
  1) left stack
  2) right stack
  3) split stack (center opening)
  4) center stack
  5) two fabric combo

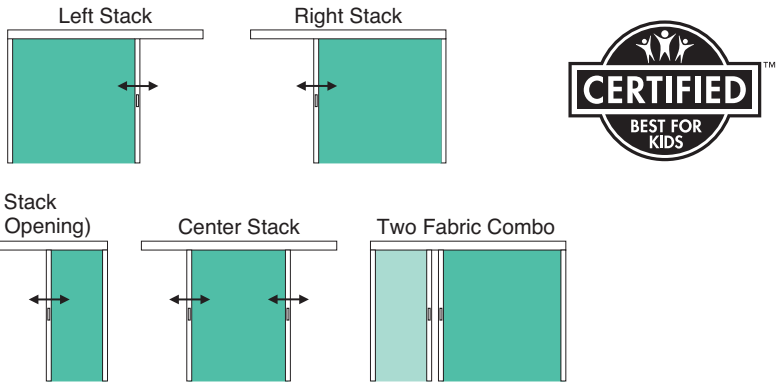

Top Rail Dimensions

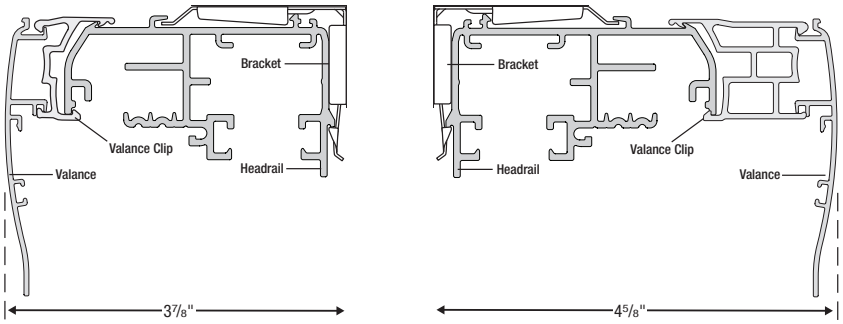

VERTICAL APPLICATION – SIZE STANDARDS					
	Cellular		Beginnings	2" Hybrid Pleat	1-1/4" Single Cell
	Large Single Cell Light Filtering	Large Single Cell Blackout	Large Single Cell Light Filtering	Light Filtering & Blackout	Light Filtering & Blackout
Min. Width	12”	12”	12”	12”	12”
Max. Width **Side & Center Stack**	168"	168"	120"	120"	120"
Max. Width **Split Stack**	336"	336"	240"	240"	240"
Max. Width **Two Fabric Combo**	168"	168"	120"	N/A	120"
Min. Height	24”	24”	24”	24”	24”
Max. Height	120”	120”	120”	120”	120”
Max Sq. ft. **Side & Center Stack**	120/panel	120/panel	100/ panel	100/ panel	100/ panel
Max Sq. ft. **Split Stack**	120/panel	120/panel	100/ panel	100/ panel	100/ panel
Max Sq. ft. **Two Fabric Combo**	120/panel	120/panel	100/ panel	100/ panel	100/ panel

NOTE: Vertical Application **not available** with Small Single or Double Cell Cellular fabrics or Subdue Blackout

NOTE: Stack is 6-1/2" space per side when fully opened, regardless of shade width

NOTE: The Vertical Application headrail color is Aspen White (785)

- Split stack up to 336"
- Two Fabric Combo Shade:
  - Not available for Hybrid Pleat
  - Hardware color follows the fabric that stacks on the left
  - CANNOT combine two different pleat sizes
  - Max width use the smaller of the two fabrics

Standard Valance Returns

3/4" Pleat	3-1/4"
1-1/4" Pleat	4"
Hybrid Fabric	4-3/8"

VERTICAL APPLICATION CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.
Measurements may vary +/- 1/8".

	Cellular	Hybrid Pleat
Inside (IB) Mount		
Headrail unit	– 1/2"	– 1/2"
Shade height	– 1/2"	– 1/2"
Valance width (non-flush)	+ 1-1/4"	+ 1-1/4"
Valance width (flush)	– 1/8"	– 1/8"
Outside (OB) Mount		
Headrail unit	– 1/2"	– 1/2"
Shade height	ordered height	ordered height
Valance width	+ 1-1/4"	+ 1-1/4"
Standard Returns		
Outside Mount	3-1/8"	4-1/4"
Inside Non Flush Mount*	1-1/2"	1-1/2"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

	Honeycomb	1-1/4"	2" Hybrid Pleat
Inside (IB) Mount			
Minimum mounting depth	1/2"	1/2"	1/2"
Minimum mounting depth, flush mount:	3-7/8"	4-5/8"	4-3/4"
Outside (OB) Mount			
Minimum flat vertical surface	5/8"	5/8"	5/8"

*For each spacer block, 1/2" will be added to the length of the valance returns. For extension brackets, 2" will be added unless otherwise specified.

HARDWARE COLOR

- Refer to the hardware color Guide and reference guide for the 10 coordinating configuration colors available.
- The Vertical Application headrail color is always Aspen White (785)

EXCLUSIONS

- All 9/16" Single, Double Cell, and Large Single Subdue Blackout

VERTICAL APPLICATION ORDERING NOTES

- Specify inside (IB), outside (OB), inside non flush mount, or flush mount.
- Specify stacking configuration – left stack, right stack, split stack, or center stack. On split stack shades, both panels will be of equal width, unless otherwise specified. Center stacks are a surcharge option.
- Inside non flush mount valance returns are 1-1/2" if returns are selected*
- Standard handle height is 40" to 50" from bottom of moving rail; specify any desired variation from this standard.
- Standard installation hardware (brackets) provided.
- Also refer to vertical application measuring in “General Information" section. NOTE: Cut-outs can be done on movable and stationary rail. 1" is the only cut-out width available for Vertical Application shades. 6" is the maximum cut-out height and the height is measured from the floor to the top of the desired cut-out location.

Cut-outs are not available on 2" Hybrid Pleat.

For OB Mounting the recommended overlap is 3" – 6".

CLASSIC SKYLIGHT CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

CLASSIC SKYLIGHT



This easy to operate system holds shades in place.
Perfect for skylights and other windows beyond reach.

- Hardware color: Aspen White (785)
- Manually operated with handle
- Ends of headrail, moving rail and anchor rail are enclosed by side tracks
- Features 2-cell fabric gasket attached to headrail; eliminates light leakage when shade is closed
- 5' adjustable extension pole – extends to 10'

CLASSIC SKYLIGHT – SIZE STANDARDS	
	Cellular
	All Fabrics
Min. Width	18"
Max. Width	60"
Min. Height	12"
Max. Height	72"
Max Area (sq. ft.)	25

NOTE: Classic Skylight is **not available** with 2" Hybrid Pleat or 1-1/4" Pleat Fabrics

NOTE: Shades over 36" wide require support cords.
Rail stiffener is required when shade is over 42" wide.

STACK LOCATION:	WINDOW POSITION:
Top, Bottom, Side	Vertical, Sloped, Horizontal

Note: Pleats will have a vertical orientation when side stack is ordered.

CLASSIC SKYLIGHT SIDE STACK – SIZE STANDARDS	
	Cellular
	All Fabrics
Min. Width	12"
Max. Width	72"
Min. Height	18"
Max. Height	60"
Max Area (sq. ft.)	25

NOTE: Classic Skylight is **not available** with 2" Hybrid Pleat or 1-1/4" Pleat Fabrics



Optional Extension Pole
Extends 5' to 10'
(Part #400036-81511)

All Fabrics



FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

Inside (IB) Mount	
Rail unit	- 3/16"
Shade height	ordered height
Fabric width	- 3/4"
Outside (OB) Mount	
Rail unit	+ 3/4"
Shade height	ordered height
Fabric width	ordered width

Measurements may vary +/- 1/8".

NOTE: All finished dimensions include side tracks.

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Inside (IB) Mount	
Minimum mounting depth IB:	1-1/4"
Minimum mounting depth, flush mount:	2-1/2"
Outside (OB) Mount	
Minimum flat vertical surface	1"

SKYLIGHT WITH AUTOMATION CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

SKYLIGHT WITH AUTOMATION

Motorized Skylights are different than Classic Skylight. Key differences include:

- Headrail and Bottomrail are identical and are the same rail used with standard Motorized shades.

Bliss and SOMFY Automation:

- Fabric stacks to the top of the window – between the moving rail and headrail

Features

- Inside Mount only
- White Tiara (661) aluminum head and bottom rails. White vinyl side rails
- Use radio frequency controlled Bliss or Somfy Automation motors
- Wireless remote control operates individual or groups of shades

Operation & Installation Tips

- Skylight with Bliss and Somfy Automation have the option of an external battery pack that can be installed on the back of the headrail. Consider adding a Battery Extension Cable to the order for installation flexibility. The part may be daisy-chained for additional flexibility.
- Shades installed into windows with metal casings may have a reduced radio frequency range, or may not operate at all
- Do not let the antenna on the motor touch any metal objects. This may interfere with signals from the remote control.
- Make sure to leave the top of the headrail open (motor exposed), do not cover; especially with metal materials. This could result in a reduced radio frequency range for the remote control or the shade may not operate at all.
- Motorized Skylights will NOT operate properly if installed in a completely horizontal application. The minimum recommended slope is 5%.

SKYLIGHT with AUTOMATION - SIZE STANDARDS	
	All Cellular Fabrics
Minimum Width	18"
Maximum Width	48"
Minimum Height	12"
Maximum Height	72"

*** Skylight Automation not available with 2" Hybrid Pleat or 1-1/4" Fabrics**

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

Inside (IB) Mount	
Headrail unit	– 3/16"
Shade height	ordered height
Fabric width	– 1-1/4"

HEADRAIL & BOTTOMRAIL DIMENSIONS

Depth of Rail	2"
Depth of Rail & Bracket	2-1/4"
Depth of Rail, Side Tracks & Bracket	2-1/2"
Height of Rail	1-1/2"

NOTE: Skylight is **not available** with 2" Hybrid Pleat or 1-1/4" Fabrics

NOT AVAILABLE with PowerWand.

MOUNTING REQUIREMENTS

- Should not be more than 1/2" out of square to perform as intended
- The widest width of the window cannot exceed the narrowest width of the window by more than 3/8"
- For Skylight Automation the shade must be mounted with the fabric at the top or the highest point in the window.

Bliss or SOMFY Automation
External Battery - Mounted away from the Headrail

Inside (IB) Mounts	
Minimum mounting depth, IB	2-1/2"

External Battery - Mounted to the back of the Headrail

Inside (IB) Mounts	
Minimum mounting depth, IB	3-1/2"

NOTE:
The dimensions of the external battery add an extra 1" to the mounting depth requirements if it is mounted to the back of the headrail.

SPECIALTY SIZE STANDARDS & MEASURING INFORMATION

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

ARCHES

Refer to "Extra Charge Options" for Surcharge and Price Information

INSIDE MOUNT
Locate shape below.
Width: Measure exact width(s)
Height: Measure exact height(s)

OUTSIDE MOUNT
Locate shape below.
Width: Measure desired width(s)
Height: Measure desired height(s)

FAN-FOLD ARCHES

NON-MOVABLE ARCH (PERFECT ARCH = EXACT 1/2 CIRCLE, TEMPLATE REQUIRED)

FAN-FOLD STATIONARY PERFECT ARCH

Must be perfect arch.



Come standard with arch disc



SIZE STANDARDS		
	SoftStyle	SoftStyle
	Large Light Filtering	Double Cell - Light Filtering & All Blackout
Min. Width	12"	12"
Max. Width	72"	60
Min. Height	6"	6"
Max. Height	36"	30

Not available with Beginnings Double Cell, 1-1/4" Pleat or 2" Hybrid Pleat

Note: Straight Side Arch is Not Available with Fan-Fold Stationary Perfect Arch

MOVABLE ARCH (PERFECT ARCH = EXACT 1/2 CIRCLE, TEMPLATE REQUIRED)

FAN-FOLD OPERABLE PERFECT ARCH

Must be perfect arch. Specify L or R arch orientation when ordering.



Shown Here – Fan Fold Left



Note: all fan-fold arches require the use of small, clear clips to be installed around the outer edge, which holds the fabric in place. The fabric must be slid out of the clips before the arch can be operated.

SIZE STANDARDS		
	SoftStyle	SoftStyle
	Large Light Filtering	Double Cell - Light Filtering & All Blackout
Min. Width	12"	12"
Max. Width	72"	60
Min. Height	6"	6"
Max. Height	36"	30

Not available with Small Single, Beginnings Double Cell, 1-1/4" Pleat or 2" Hybrid Pleat

Note: Straight Side Arch is Not Available with Fan-Fold Operable Perfect Arch

NON-MOVABLE ELLIPTICAL ARCH (TEMPLATE REQUIRED)

FAN-FOLD STATIONARY ELLIPTICAL ARCH

Non-perfect arch.

Come standard with arch disc



SIZE STANDARDS		
	SoftStyle	SoftStyle
	Large & Small Light Filtering	Double Cell - Light Filtering & All Blackout
Min. Width	12"	12"
Max. Width	72"	60"
Min. Height	1/4 width (6" min)	1/4 width (6" min)
Max. Height	1/2 width	1/2 width

Not available with Beginnings Double Cell, 1-1/4" Pleat or 2" Hybrid Pleat

Note: Straight Side Arch is Not Available with Fan-Fold Stationary Elliptical Arch

SPECIALTY SIZE STANDARDS & MEASURING INFORMATION

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

CIRCLES, QUARTER CIRCLES & ANGLE CUTS (TEMPLATE REQUIRED)

Refer to "Extra Charge Options" for Surcharge and Price Information

INSIDE MOUNT
Locate shape of window.
Width: Measure exact width(s)
Height: Measure exact height(s)
Diagonal: Measure height of diagonal(s) (for Angle Cuts)

OUTSIDE MOUNT
Locate shape of window.
Width: Measure desired width(s)
Height: Measure desired height(s)
Diagonal: Measure length of diagonal(s) (for Angle Cuts)

CIRCLES & QUARTER CIRCLE (TEMPLATE REQUIRED)



SIZE STANDARDS	All Fabrics
Min. Width (diameter)	12"
Max. Width (diameter)	42"
Min. Height	N/A
Max. Height	N/A

Not available with 2" Hybrid Pleat



SIZE STANDARDS	All Fabrics
Min. Width (diameter)	12"
Max. Width (diameter)	42"
Min. Height	N/A
Max. Height	N/A

Not available with 2" Hybrid Pleat

Non-operable ONLY

ANGLE CUTS (TEMPLATE REQUIRED)

ANGLED TOP (TEMPLATE REQUIRED)

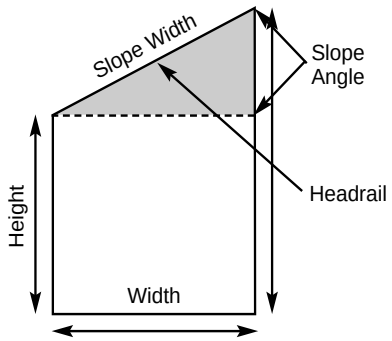

Non-operable ONLY

	SoftStyle Light Filtering Fabrics	SoftStyle Blackout Fabrics	SoftStyle Double Cell Fabrics
Minimum Height (L/R)	3"	3"	3"
Maximum Height	84"	72"	84"
Maximum Area (sq ft)	35	35	30
MINIMUM SLOPE WIDTH			
0 - 30 Angle	12	12	12
MAXIMUM SLOPE WIDTH			
0 - 30 Angle	60"	60"	60"

NOTE: Angle Top is **not available** with 2" Hybrid Pleat or 1-1/4" Fabrics

HEXAGON & OCTAGON (TEMPLATE REQUIRED)

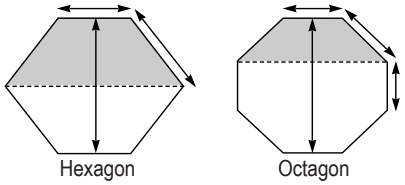

- Minimum width and minimum height – 8″
- Maximum width and maximum height – 30″

Non-operable ONLY

SIZE STANDARDS	All Fabrics*
Min. Width	8"
Max. Width	30"
Min. Height	8"
Max. Height	30"

*Not available with 2" Hybrid Pleat

TRAPEZOID (ALL PATTERNS) (TEMPLATE REQUIRED)



- Minimum width – 8"
- Maximum width of long rail – 72"
- Maximum reduction for short rail – 9" per side
- Maximum height – 96"
- Maximum area (sq. ft.) – 40

Non-operable ONLY

SIZE STANDARDS	All Fabrics*
Min. Width	8"
Max. Width	72"
Min. Height	9"
Max. Height	96"

*Not available with 2" Hybrid Pleat

SPECIALTY SIZE STANDARDS & MEASURING INFORMATION

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

ARCHES & QUARTER CIRCLES

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

Inside (IB) Mount	
Rail unit	- 3/16"
Arch height	ordered height
Fabric width	- 3/8"
Outside (OB) Mount	
Rail unit	+ 3/16"
Arch height	ordered height
Fabric width	ordered width

NOTE: Measurements may vary ± 1/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Inside (IB) Mount	
Minimum mounting depth:	
Standard installation bracket	1-1/4"
Minimum mounting depth, flush mount:	
Standard installation bracket	2-1/4"
Outside (OB) Mount	
Minimum flat vertical surface	1"

CIRCLES

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

Inside (IB) Mount	
Rail unit	- 1/16"
Arch height	- 3/32"
Fabric width	- 3/8"
Outside (OB) Mount	
Rail unit	+ 3/32"
Arch height	+ 1/32"
Fabric width	ordered width

NOTE: Measurements may vary ± 1/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Inside (IB) Mount	
Minimum mounting depth	1-7/8"
Outside (OB) Mount	
Minimum flat vertical surface	5/8"

ANGLES

FINISHED DIMENSIONS

Finished dimensions vary depending on the degree of the angle.

MOUNTING REQUIREMENTS

Inside (IB) Mount		
Minimum mounting depth:		
Standard installation bracket		1-1/4"
Minimum mounting depth, flush mount:		
Standard installation bracket		2-1/4"
End mount bracket		2"
Outside (OB) Mount		
Minimum flat vertical surface	1"	1"

SPECIALTY SHAPES

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

Inside (IB) Mount	
Rail unit	- 3/16"
Arch height	ordered height
Fabric width	- 3/8"
Outside (OB) Mount	
Rail unit	+ 3/16"
Arch height	ordered height
Fabric width	ordered width

NOTE: Measurements may vary ± 1/8"

MOUNTING REQUIREMENTS

SAME AS ARCHES AND QUARTER CIRCLES